

Product combinations

FLINT HI-FLOOR AND CONTINUUM BY FLINT enable the fitting of combination flooring systems in which the two surfaces join to achieve complete visual continuity. To suit different needs within a space, FLINT HI-FLOOR and CONTINUUM BY FLINT can be fitted in different adjacent areas, resulting in imperceptible transitions between the two types of flooring.

FLINT HI-FLOOR is 100% waterproof and ideal for fitting in wet areas or spaces that require thorough cleaning, such as bathrooms, kitchens, wellness spas, fitness centres, etc.

These types of spaces often have adjacent areas that do not require 100% waterproof protection, such as dining rooms, lounges, bedrooms and utility rooms – spaces in which CONTINUUM BY FLINT can offer the same surface wear resistance.

Two technical flooring systems with different properties but the same aesthetic and complete continuity of fitting.


It is necessary to use Primary Underlay in both the FLINT HI-FLOOR and CONTINUUM BY FLINT sections.

Start by fitting the FLINT HI-FLOOR section, using the Levelling Underlay (Ref. 088002.20002) on top of the Primary Underlay (Ref. 088001.10002) to enable the difference in the thickness of the panels to be levelled.



Then follow the general fitting instructions supplied with the product.

Finish fitting the FLINT HI-FLOOR section and, starting from the end panels that mark the boundary between the two areas, begin fitting the CONTINUUM BY FLINT flooring.

CONTINUUM BY FLINT panels easily attach to FLINT HI-FLOOR panels as they feature the same manual clicking system. Finish fitting the CONTINUUM BY FLINT floor section following the general instructions supplied with the product.

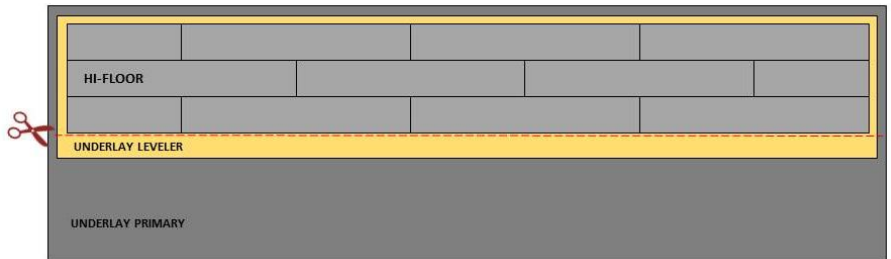

When attaching CONTINUUM BY FLINT panels to FLINT HI-FLOOR panels, make sure that the male and female elements fit correctly before applying tension. Failure to do so properly could result in damage to the CONTINUUM BY FLINT panel as it is made from a softer material than the FLINT HI-FLOOR. It is important to bear in mind that the floors have different degrees of hardness.

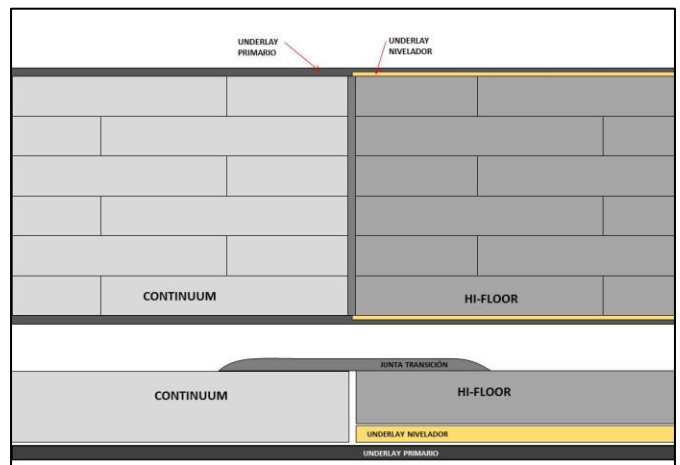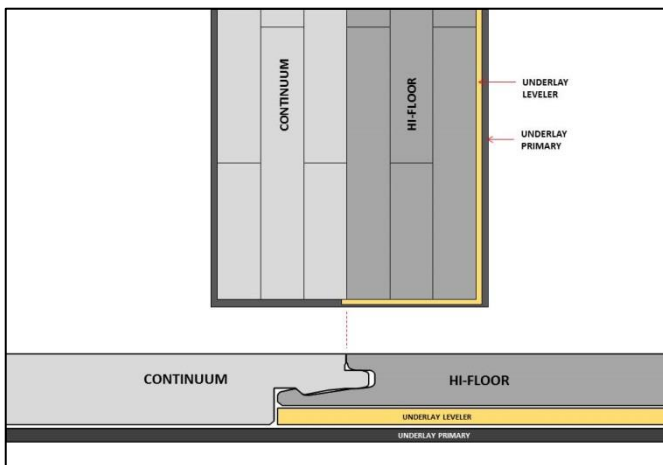

To achieve complete visual continuity of the two surfaces, we recommend an arrangement in which the panels are joined along their long sides. This ensures that the join between the panels using the clicking system is imperceptible.

If, instead, you opt for joining the panels along their short sides, make sure that a small expansion gap is left between them. This can be covered later with a FLINT transition joint, available in the same finishes as the flooring for complete visual integration.